




Compact size, big potential.

Professional Series: Fixed lens HDCVI domes available in 4.0MP

High performance fixed-lens surveillance with a flat glass lens window for crystal clear images. Create amazing analogue upgrades with this high resolution, long range infrared, full metal triaxis HDCVI dome camera.

- Stream up to 4.0MP (2560 x 1440) at 25fps
- Fixed 3.6mm lens with wide viewing angles
- Up to 700m video transmission over coaxial cable
- Smart infrared illumination, up to 50m range
- Dual BNC outputs for HD and composite video
- True WDR (120dB) and 2D/3D noise reduction
- IP67 rated weather resistant metal housing
- Superb minimum illumination 0.01lx

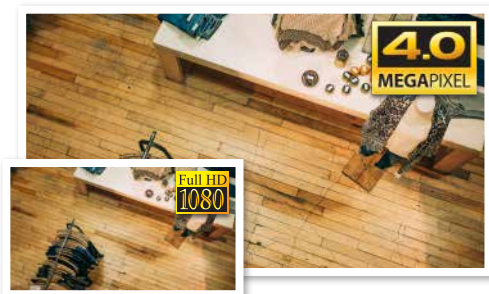

Up to 9x Image Resolution vs D1



Dedicated HD / SD Outputs



Weather Resistant Housing

Model		VSCVI4MPDIR						
Camera	Image Sensor	1/3" 4.1 Megapixel CMOS						
	Effective Pixels	2688 (H) x 1520 (V)						
	Signal Noise Ratio	> 65dB						
	Lens	3.6mm F1.5 Fixed Lens						
	Angle of View	79°						
	Focus	Fixed / 1.5m Min. Focus Distance						
	Minimum Illumination	0.01 Lux at F1.5 (Colour) / 0 Lux IR Active						
	Electronic Shutter	1/4 ~ 1/100,000s						
	Day/Night	Auto (ICR) / Colour / B&W						
	Infrared Range	50m						
	White Balance	Auto / Manual						
	Noise Reduction	2D / 3D						
	Gain Control	Auto						
Lighting Compensation	BLC / HLC / WDR (120dB)							
Video	Resolution	4.0MP (2560 x 1440) to CIF (352 x 288)						
	Frame Rate	25fps (4.0MP), 25fps (1080p and lower)						
	Transmission Distance	Rated for up to 700m via 75-3 coaxial cable (performed in ideal test conditions)						
DORI	Detect	80m						
	Observe	32m						
	Recognise	16m						
	Identify	6m						
Interface	Audio Input	N/A						
	Alarm Interface	N/A						
	Video Output	2 x BNC video output (1 x HDCVI / 1 x Composite SD)						
	Synchronisation	Internal						
	OSD Menu	Support						
Environmental	Ingress Protection	IP67						
	Vandal Resistant	N/A						
	Housing	Metal						
	Power Input	12VDC						
	Power Consumption	< 5.3W						
	Dimensions	Ø106 x 94mm						
	Weight	0.44kg						
Operating Environment	-30° to 60°C / RH90% (max)							
Diagram								
Accessories								
	Junction Box	Right Angle Bracket	Right Angle Bracket - Adapter	Pole Mount - Junction Box	Pole Mount - Right Angle Bracket	Pole Mount - Right Angle Bracket	Ceiling Extension	Corner Mount
VSBKTA139 VSBKTA130E VSBKTA121	VSBKTB204W	VSBKTB305W + VSBKTA106	VSBKTA139 / VSBKTA130E + VSBKTA152E	VSBKTB204W + VSBKTA152E	VSBKTB305W + VSBKTA106 + VSBKTA150	VSBKTB220C + VSBKTA106 (Extensible: VSBKTA117)	VSBKTB305W + VSBKTA106 + VSBKTA151	

Your local Securview™ HDCVI solutions professional: