

# 1.3 Megapixel Infrared Fixed Mini Dome

Model: VSIP1MPVDMINIIRC



Impressive image quality, innovative infrared and vandal resistance in a compact package, the VIP Vision mini dome is perfect for all residential and small business IP surveillance applications.

## Camera Features

- Stream up to 1.3 megapixel (1280 x 960) at 25fps
- 3.6mm fixed lens with 70° viewing angle
- Day/night (auto ICR) with 30m maximum infrared range
- Backlight/highlight compensation with digital WDR
- 3D digital noise reduction and auto white balance
- Power via 12VDC or Power over Ethernet (802.3af)
- P66 and IK10 rated housing for external use
- Profile S ONVIF compliance
- Available in 2.8mm (90°) and 6.0mm (44°) lens configurations

## Compatible Accessories

Sold separately. Adapters may be required, check compatibility list for details.



VSBKT200W


VSBKTA123

VSBKTA130

VSBKTA152

VSBKTA151

Model		VSIP1MPVDMINIIRC
<b>General</b>		
Camera Style	Weather/Vandal Resistant Mini Dome	
Image Sensor	1/3" 1.3 Megapixel Progressive Scan CMOS	
Effective Pixels	1280 (H) x 960 (V)	
Signal Noise Ratio	> 50dB	
<b>Camera</b>		
Lens	3.6mm F1.6 Fixed Lens	
Angle of View	70°	
Electronic Shutter	Auto / Manual (1/3 ~ 1/10000s)	
Minimum Illumination	0.05 Lux at F1.6 (Colour) / 0 Lux at F1.6	
Day/Night	Auto (ICR) / Colour / B&W	
White Balance	Auto	
Noise Reduction	3D Digital Noise Reduction	
Gain Control	Auto / Manual	
Backlight Compensation	BLC / HLC / DWDR	
Audio Input	Built-in microphone	
Audio Compression	G.711a / G.711u / PCM	
Alarm Interface	N/A	
Network Interface	RJ45 (10/100 Base-T)	
Memory Slot	N/A	
Bit Rate	H.264: 56K ~ 8192Kbps	
ONVIF Conformance	Profile S Compliant	
Smart Functions	N/A	
<b>Video</b>		
Video Compression	H.264 / MJPEG	
Resolution	Configurable from 1.3MP (1280 x 960) to CIF (352 x 288)	
Frame Rate	Main	1.3MP and lower (1 ~ 25fps)
	Sub	D1 and lower (1 ~ 25fps)
	Third	N/A
Video Output	N/A	
<b>Environment</b>		
Ingress Protection	IP66	
Vandal Resistant	IK10	
Maximum Infrared Range	30m	
Power Input	12VDC / PoE (802.3af)	
Power Consumption	< 4.5W	
Dimensions	Ø108 x 84mm	
Weight	0.40kg	
Operating Environment	-20° to 60°C / RH95% (max)	
<b>Product Dimensions</b>		

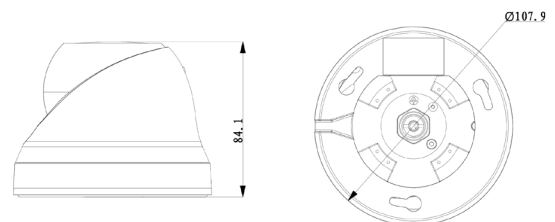

Product Variants by Model	
VSIP1MPVDMINIIRC2.8	2.8mm F1.6 Fixed Lens (90°)
VSIP1MPVDMINIIRC6	6.0mm F1.6 Fixed Lens (46°)

Your local VIP Vision™ professional: