

Ultimate Series 1080p 20x Zoom HDCVI PTZ

Model: VSCVI2MPPTZIRB



Every moment captured with the Securview HDCVI PTZ series. Enjoy Full HD 1080p streaming, convenient endless 360° panning at 400°/s preset speed, and high-power infrared up to 100m.

Camera Features

- Streams Full HD 1080p/2.0MP (1920 x 1080)
- Motorised 4.7 ~ 94mm lens, auto iris
- 54.1 ~ 3.2° horizontal viewing angles
- Up to 300m HD video transmission over coax
- Infrared illumination up to 100m
- IP66 for weather resistant housing
- HD/SD switchable output for analogue DVRs
- Endless 360° panning, 105° tilt-range & auto-flip 180°
- Alarm and audio I/O interface
- Digital WDR & 3D noise reduction

Compatible Accessories

Accessories sold separately, additional adapters may be required.



VSBKTA120



VSBKTA140



VSBKTB300C




VSBKTA150



VSBKTA151

Model	VSCVI2MPPTZIRB
General	
Camera Style	Weather Resistant PTZ Dome
Image Sensor	1/2.8" 2.0 Megapixel Exmor CMOS
Effective Pixels	1920 (H) x 1080 (V)
Signal Noise Ratio	> 50dB
Camera	
Lens	4.7 ~ 94mm Motorised Lens; Auto Iris
Angle of View	54.1° (wide) ~ 3.2° (tele)
Electronic Shutter	1/1 ~ 1/30,000s
Minimum Illumination	0.05 Lux at F1.4 (Colour) / 0.005 Lux (B&W) IR Active
Day/Night	Auto (ICR) / Colour / B&W
White Balance	Auto, ATW, Indoor, Outdoor, Manual
Noise Reduction	2D / 3D
Gain Control	Auto/Manual
Backlight Compensation	BLC / HLC / DWDR
Audio Input	1 channel in
Transmission Distance	Up to 300m via 75-3 coaxial cable
Synchronisation	Internal
OSD Menu	Support
Alarm Interface	2 channel in / 1 channel out
Video	
Video Compression	H.264 / MJPEG
Resolution	1080p (1920 x 1080) to CIF (352 x 288)
Frame Rate	25fps (1080p and lower)
Video Output	BNC CVI HD output / CVBS SD output (switchable)
PTZ	
RS485	1 input
Pan/Tilt Range	Pan: 0° ~ 360° endless / Tilt: -15° ~ 90° / Auto-flip 180°
Manual PTZ Speed	Pan: 0.1° ~ 300°/s; Tilt: 0.1° ~ 200°/s
Preset PTZ Speed	Pan: 400°/s; Tilt: 300°/s
Presets	300(DH-SD) / 255(Pelco-P/D)
PTZ Modes	5 Pattern / 8 Tour / Auto Pan / Auto Scan
Protocols	DH-SD / Pelco-P/D (Auto Recognition)
Environment	
Ingress Protection	IP66
Vandal Resistant	No
Maximum Infrared Range	100m
Power Input	24VAC 3A ±10%
Power Consumption	12W / 25W (IR active)
Dimensions	Ø186 x 310mm
Weight	3.5kg
Operating Environment	-40° to 70°C / RH90% (max)
Product Diagram	

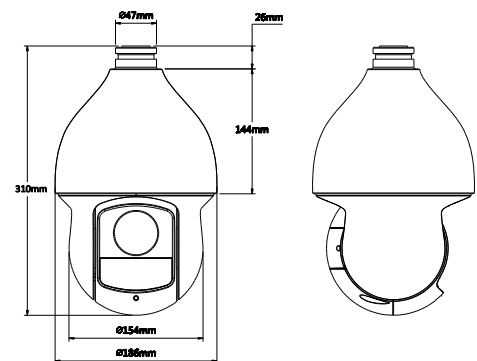

Your local Securview™ professional: