

TFT LCD MONITOR



Operating instructions

Before operating this set, please read these instructions completely

MONITOR


Remote window
Power light
AV/TV




SPECIFICATION

Screen size : 7 inch
 Power supply : DC12V
 Power consumption : 7.5W
 Display format : 16 : 9
 Video : Dual video input.
 System : NTSC/PAL
 Pixels : 480(W) X RGB X 234(H)
 Blue screen appears when no signal.

OPERATIONS OF REMOTE CONTROLLER

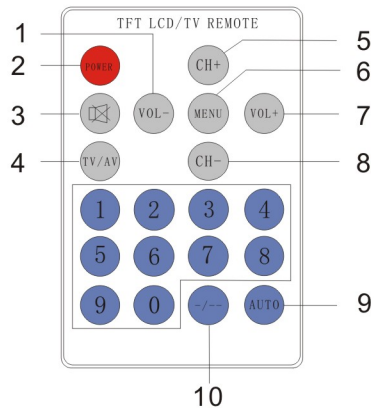

- 1、 Volume down
- 2、 Power on/off
- 3、 Mute
- 4、 AV/TV
- 5、 Channel up
- 6、 Menu
- 7、 Volume up
- 8、 Channel down
- 9、 Auto choosing
- 10、 Channel choosing

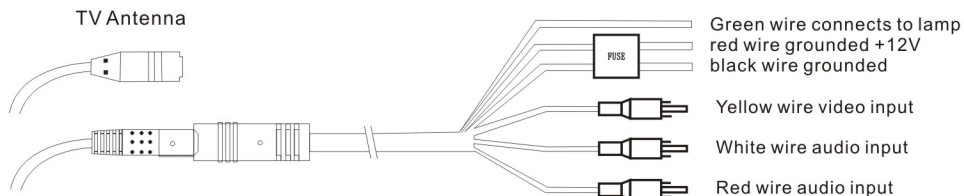

● Notes

1. The positive pole of the power should be connected to the mainline from the power capacity in case of sudden voltahe decreasing.
2. Please distinguish the positive pole and the negative pole before connect to the power source ,or the safety fuse in the disaster box will melt protectively. At this time, please replace a 2A safety fuse.
3. The main part of this item is LCD panel, the surface is glass, please protect against moisture, insilation and bump.
4. High voltage inside! Non-technical suthorized person is not allowed dismantling the unit.
5. LCD may have a few color dots or bright dots, which is common for the matrix display technology, and doesn't indicate defects or faults.