

# Silver Flush Mount Residential Intercom Door Station

Model: INTIPRDSV



Specifications - Door Station		
System	Main Processor	Embedded Microprocessor
	Operating System	Embedded Linux OS
Camera	Image Sensor	1.0 Megapixel CMOS
	Video Compression	H.264
Audio	Audio Input	Omni-directional Microphone
	Audio Output	Built-in Loudspeaker
	Bidirectional Talk Support	Yes
Design	Backlit Interface	Yes
	Operational Input	Single Hard Button
	Card Support	N/A
	Tamper Detection	Yes
Storage	Vandal Resistant	N/A
	Memory Capacity	128MB
Network	Ethernet	10M/100Mbps Self-adaptive
	Network Protocol	TCP/IP
General	Ingress Protection	N/A
	Operating Temperature	-10 ~ +60°C
	Power Input	12VDC
	Power Consumption	Standby <1W / Operation <10W
	Dimensions	141 x 100 x 42mm
	Weight	0.80kg

## Product Highlights

- 1.0 megapixel day/night door station camera
- Durable aluminium body with backlit interface
- Ease of use with one-press calling & voice prompting


## Product Overview

The INTIPRDSV is a single channel video intercom solution ideal for homes and single-premises buildings. This compact unit features a stylish aluminium construction and a 1.0 megapixel camera that operates in low light conditions.

The intercom is very simple to operate with a single backlit, multi-coloured button that controls calling and voice prompting/confirmation for ease of use. It also features door sensor and door strike integration, remote unlock via smartphone and visitor audio/video messaging functions.

This door station is not weatherproof or vandal resistant. It is recommended that the door station be installed in a sheltered location, under eaves or awnings.

## Product Diagram

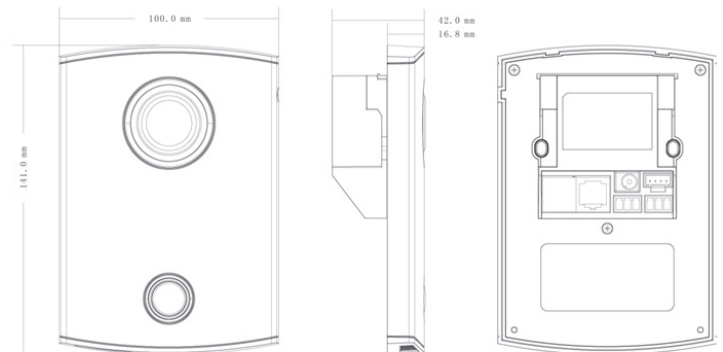

Your VIP Vision intercoms dealer: