

Experience your moment of victory™



**FULL
HD
1080P**

*HD Video Over
Coaxial Cable
Technology*

Large Scale HD Over Coax.

16 Channel 1080p HDCVI Complete Surveillance Kit


Model: CVR16PACK5

- 8 x 2.0 megapixel weatherproof bullets
- 8 x 2.0 megapixel weatherproof mini domes
- Pre-installed 2TB surveillance HDD
- Backup via USB device or local network
- Record 1080p (1920 x 1080) at 12fps
- HDMI, VGA and BNC video outputs
- Remote view configuration via QR code
- View on iOS, Android & Windows Phone devices

Upgrade from analogue to nearly 5 times more than your image resolution!

Experience your
moment of victory

- Upgrade your system
- Boost image resolution
- Capture fine detail
- Get usable evidence
- Enjoy peace of mind

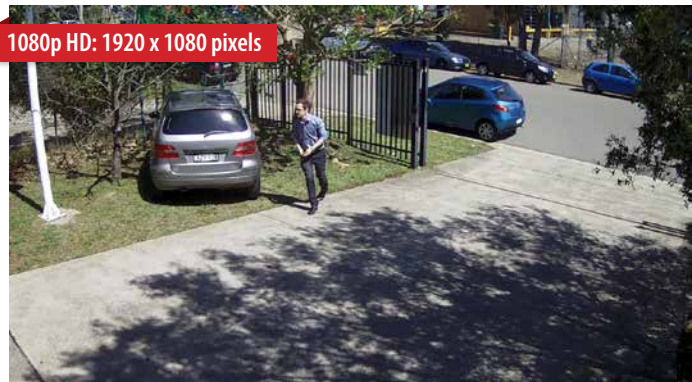

16 Channel 1080p HDCVI Complete Surveillance Kit

Model: CVR16PACK5



Product Overview

The CVR16PACK5 is a 16 channel surveillance system capable of 1080p HD recording over coax cable at 12fps. It features a slim 1U DVR with HDMI and VGA outputs as well as a preinstalled 2TB surveillance hard drive. This DVR also has comprehensive remote view (iOS, Android & Windows Phone) and backup functionality (USB/network).

The CVR16PACK5 is an ideal analogue to HD-video-over-coax upgrade package that enables you rapidly boost the image resolution of an existing analogue installation to high definition.

Victory Series products utilise the HDCVI video transmission standard, delivering video, audio and data across a single coaxial cable (RG59 / RG6 75-3 preferred). This also allows for up to 300m transmission distances for 1080p HD video streams using standard coaxial cable (500m for 720p video).

The CVR16PACK5 includes 16 weatherproof, 3.6mm fixed lens (90°), infrared, 2.0 megapixel cameras that are ideal for use in a multitude of applications. They can record at maximum resolution of 1080p (1920 x 1080), nearly 5 times the resolution than typical D1 analogue systems (720 x 576).

This kit does not include coaxial cable, splitters or camera power supplies. For new installs, one Victory Series accessory kit is required per 4 cameras (CVR4PACKACC).

Your Securview Victory Series dealer:

Model	CVR16V5
System	
Main Processor	Embedded Processor
Operating System	Embedded Linux OS
Video Input	16 channel BNC
Camera Configurations	Coaxial: 16 channels up to 1080p/12fps (HDCVI), 960H/25fps (analogue)
	Network: 24 channels up to 1080p/25fps (replaces up to 16 x BNC inputs)
Audio In/Out	4ch RCA in / 1ch RCA out
Two-way Talk	Reuse channel 1 audio input/output
Display	
Video Output	1 HDMI / 1 VGA
Display Resolution	1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768
Display Split	1 / 4 / 8 / 9 / 16
OSD	Camera title, time, video loss, camera lock, MD & recording
Recording	
Maximum Resolution	1080p (1920 x 1080) / 720p (1280 x 720)
Frame Rate	Main: 1080p (1~15fps), 720p (1~25/30fps) / Sub: D1 (1~15fps)
Bit Rate	1~6144Kb/s
Record Modes	Manual / Schedule (Regular [Continuous], MD) / Stop
Detection	
Alarm Input / Output	16 channel input / 3 channel relay output
Trigger Events	Recording; PTZ; tour; alarm; push video notification; email notification; FTP upload; snapshot; internal buzzer; and screen tip overlay
Video Detection	MD zones: 396 (22 x 18) / Video loss / Camera blank
Playback & Backup	
Playback Sync	1 / 4 / 9 / 16
Search Modes	Time/Date; Motion detection; Exact search (to the second)
Backup Modes	USB Device / Internal SATA burner / Network
Network	
Ethernet	2 x RJ-45 port (10/100M/1000M)
Max. User Access	128 users
Remote View	iOS (iPhone, iPad); Android devices, Windows Phone
Storage	
Internal HDD	2 SATA port, up to 12TB
Auxiliary	
USB Interface	2 ports (1 Rear) USB3.0, (1 Front) USB2.0
Auxiliary Inputs	1 x RS485 port (for PTZ)
General	
Power Supply	DC12V/4A
Operating Environment	-10 ~55°C / 10~90%RH / 86~106kpa
Dimensions	375mm x 285mm x 55mm (1U)
Weight	2.35kg (without HDD)

Camera Model	VSCVI2MPFBIRV4	VSCVI2MPVDIRV2
General		
Camera Style	Weatherproof Bullet	Vandal Resistant Dome
Image Sensor	1/2.7" 2.1 Megapixel CMOS	
Effective Pixels	1928 (H) x 1088 (V)	
Camera		
Lens	3.6mm Fixed Lens (90°)	
Day/Night	Auto (ICR) / Colour / B&W	
Backlight Compensation	BLC / HLC / WDR (120dB)	
Audio Input	N/A	
Video		
Resolution	1080p (1920 x 1080) to CIF (352 x 288)	
Video Output	BNC CVI HD output / CVBS SD output (switchable)	
Environment		
Ingress Protection	IP67	IP67
Vandal Resistant	N/A	IK10
Maximum Infrared Range	40m	30m
Power Input	12VDC	12VDC