

12VDC 7Ah Sealed Lead Acid Battery


Model: D12V7A



The D12V7A is a sealed lead acid battery with a rated capacity of 7.00Ah, lasting up to 20 hours. It is suitable as a backup battery for applications in alarm systems, uninterruptible power supplies, emergency lighting, medical equipment & more.

- Maintenance free sealed lead acid battery
- Non-spillable design & construction
- High quality and high reliability
- Low self discharge
- Power failure backup battery
- 12VDC voltage / 7.0 AH capacity
- 5 year lifespan

Model	D12V7A
Capacity	7Ah
Voltage	12V
Rated Capacity	7.00Ah 20hr Rate (0.350A to 10.8V) 6.53Ah 10hr Rate (0.653A to 10.8V) 5.13Ah 3hr Rate (1.710A to 10.5V)
Charge Method (25°C)	Max Charge Current: 2.8A Cycle Use: 14.4 ~ 15V (-30mV/°C) Float use: 13.5 ~ 13.8V (-20mV/°C)
Max. Discharge Current	105A (5S)
Internal Resistance	Full charged at 25°C: 28 mOhms
Terminal	T2
Self Discharge	3% of capacity declined per month at 20°C
Lifespan	≤5 years
Container Material	ABS
Operating Temperature	Discharge: -15 ~ 50°C Charge: 0 ~ 40°C Storage: -15 ~ 40°C
Dimensions	151mm x 65mm x 94mm
Weight	Approx. 2.05kg

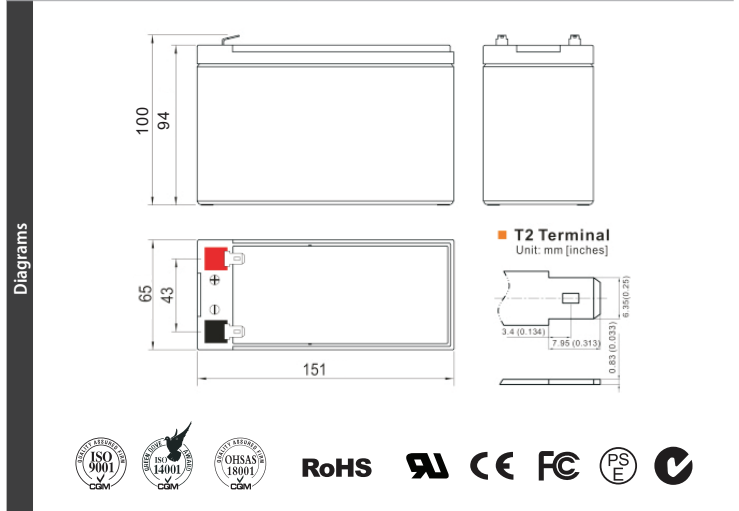

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	16.0	11.7	9.97	8.46	6.17	4.52	3.60	2.14	1.60	1.31	1.10	0.95	0.756	0.626	0.343
1.80V/cell	19.2	13.7	11.3	9.20	6.65	4.80	3.83	2.24	1.66	1.35	1.14	0.99	0.783	0.653	0.350
1.75V/cell	21.5	14.9	12.0	9.70	6.92	4.99	3.98	2.31	1.71	1.38	1.16	1.01	0.795	0.663	0.357
1.70V/cell	23.4	15.9	12.8	10.2	7.18	5.12	4.05	2.36	1.75	1.41	1.19	1.03	0.812	0.672	0.361
1.65V/cell	25.5	16.8	13.4	10.6	7.43	5.28	4.17	2.40	1.77	1.43	1.21	1.04	0.823	0.680	0.365
1.60V/cell	26.8	17.6	13.8	10.9	7.64	5.42	4.26	2.46	1.81	1.46	1.23	1.06	0.837	0.690	0.371


Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	30.3	22.3	19.2	16.4	12.0	8.86	7.09	4.23	3.17	2.59	2.20	1.91	1.52	1.26	0.694
1.80V/cell	35.9	25.8	21.5	17.7	12.9	9.37	7.52	4.42	3.30	2.69	2.27	1.97	1.57	1.31	0.704
1.75V/cell	39.8	28.0	22.8	18.6	13.4	9.72	7.79	4.55	3.37	2.74	2.31	2.00	1.59	1.33	0.716
1.70V/cell	42.8	29.5	24.0	19.3	13.8	9.89	7.88	4.61	3.42	2.78	2.34	2.03	1.61	1.33	0.718
1.65V/cell	45.7	30.7	24.8	19.8	14.1	10.1	8.02	4.65	3.45	2.80	2.36	2.05	1.62	1.34	0.720
1.60V/cell	47.0	31.5	25.1	20.1	14.3	10.3	8.13	4.73	3.50	2.83	2.39	2.07	1.63	1.35	0.728


Performance Diagrams

Model: D12V7A


Curves of discharge capacity and ambient temperature

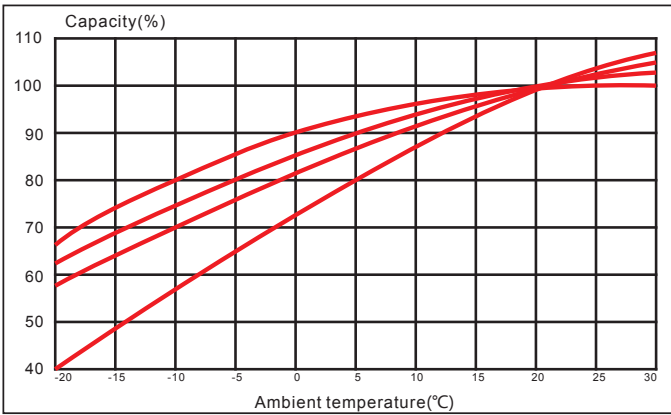


Curves of charging characteristics

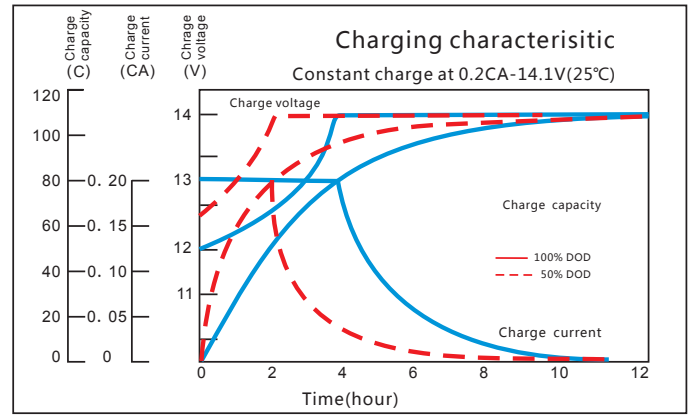


Discharge characteristics at different discharge rate (20°C)

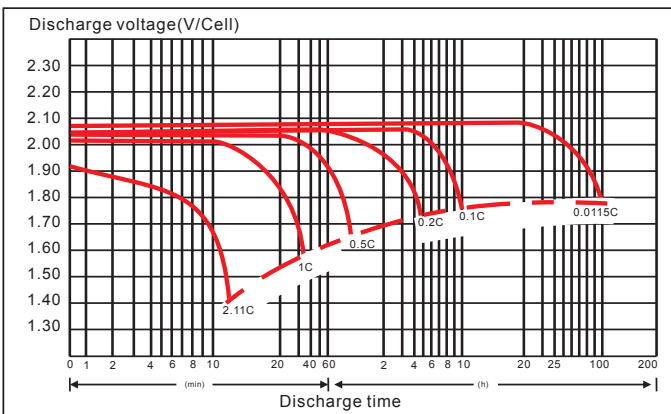


Curves of cycle life

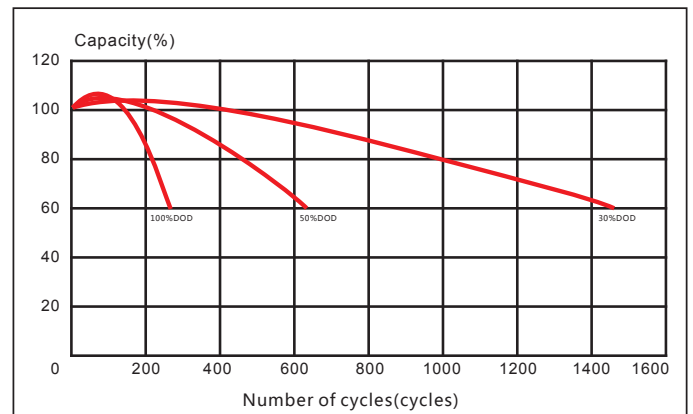

Curves of self-discharge and storage time

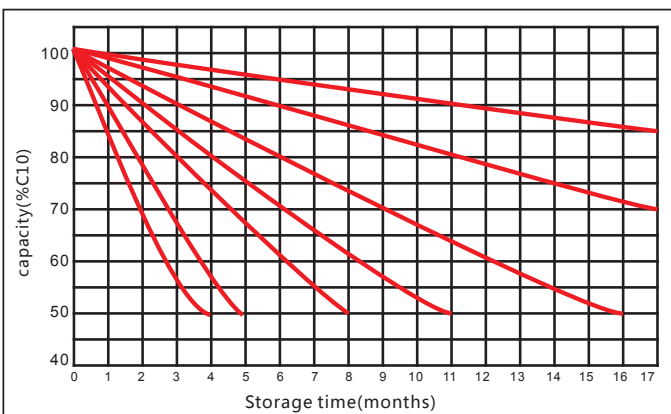

Curves of float voltage and ambient temperature

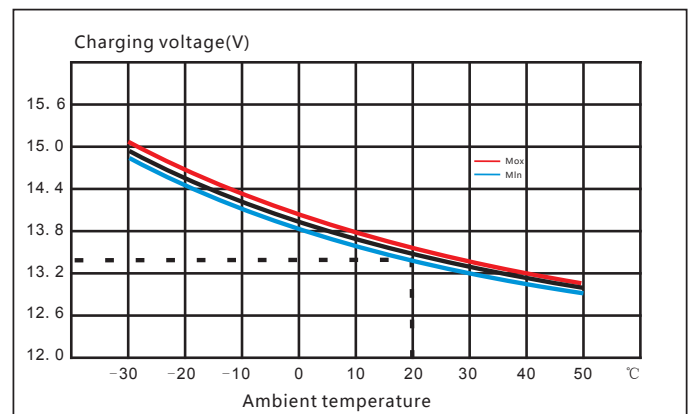

Charging procedures

Application type	Charge Voltage(V)			Max charge current (A)
	Temp (°C)	Set point	Temperature compensation	
Cycle use	25	14.4	-5mV/°C/cell	0.25C
Float use	25	13.65	-3mV/°C/cell	

Relationship between discharge current and voltage

Discharge rate	1hr	3hr	8hr	10hr
End voltage (V)	10.5	10.8	10.8	10.8
Discharge current (A)	0.55C	0.25C	0.12C	0.1C