




Excels in all applications.


Professional Series: Motorised lens HDCVI domes available in 2.0MP & 5.0MP

An excellent camera in all conditions with a wide range of compatible brackets, Professional Series domes from Securview offer up to 9x analogue resolution & easy adjustments via a motorised lens, all in a durable housing.

- Stream up to 5.0MP (2592 x 1944) at 20fps
- 2.7~13.5mm motorised varifocal lens with fixed iris
- Up to 700m video transmission over coaxial cable
- Smart infrared illumination, up to 30m range
- Superb low light colour images as low as 0.005lx
- True WDR (120dB) and 2D/3D noise reduction
- Dual voltage compatible: 12VDC and 24VAC
- IP67/IK10 for weather and vandal resistance

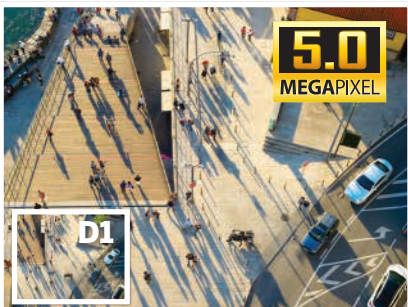

Up to 12x Image Resolution vs D1

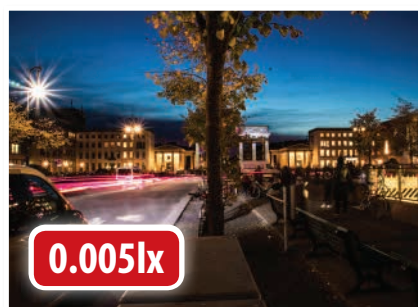

Superb Low Light Performance



Dual Voltage Compatible

Model		VSCVI2MPVDIRMV4	VSCVI-5DIRMD				
Camera	Image Sensor	1/2.8" 2.1 Megapixel CMOS	1/2.8" 5.0 Megapixel CMOS				
	Effective Pixels	1920(H) x 1080(V)	2592 (H) x 1944 (V)				
	Signal Noise Ratio	> 65dB					
	Lens	2.7 ~ 13.5mm F1.6 Motorised Lens; Fixed Iris					
	Angle of View	2.7 ~ 13.5mm F1.3 Motorised Lens; Fixed Iris					
	Focus	109° (wide) ~ 29° (tele)					
	Minimum Illumination	Auto/Manual / 0.2m Min. Focus Distance					
	Electronic Shutter	0.004Lux/F1.6, 30IRE, 0Lux IR Active					
	Day/Night	1/4 ~ 1/100,000s					
	Infrared Range	Auto (ICR) / Manual					
White Balance	30m						
Noise Reduction	Auto / Manual						
Gain Control	2D / 3D						
Lighting Compensation	Auto						
Video	Resolution	BLC / HLC / WDR (120dB)					
	Frame Rate	1080p (1920 x 1080) to CIF (352 x 288)	5.0MP (2592 x 1944) to CIF (352 x 288)				
	Transmission Distance	25fps (1080p and lower)	20fps (5.0MP), 25fps (4.0MP and lower)				
DORI	Distance	Rated for up to 700m via 75-3 coaxial cable (performed in ideal test conditions)					
		Detect	44m (wide) / 153m (tele)	64m (wide) / 222m (tele)			
		Observe	18m (wide) / 61m (tele)	26m (wide) / 89m (tele)			
		Recognise	9m (wide) / 31m (tele)	13m (wide) / 44m (tele)			
Interface	Identify	5m (wide) / 15m (tele)	6m (wide) / 22m (tele)				
	Audio Input	N/A	1 channel in				
	Alarm Interface	N/A					
	Video Output	1 x HDCVI / AHD / TVI / Composite Video Output (DIP switch)					
Environmental	Synchronisation	Internal					
	OSD Menu	Support					
	Ingress Protection	IP67					
	Vandal Resistant	IK10					
	Housing	Metal, Polycarbonate					
	Power Input	12VDC / 24VAC					
	Power Consumption	< 5.9W	< 11.8W				
Accessories	Dimensions	Ø122 x 89mm					
	Weight	0.43kg	0.48kg				
Operating Environment	-30° to 60°C / RH90% (max)						
Diagram							
Accessories							
Models	Junction Box (VSBKTA137)	In-Ceiling Mount (VSBKTB200C)	Wall Mount (VSBKTB203W)	Wall Mount Rain Shield (VSBKTA200W)	Ceiling Extension (VSBKTA106 + VSBKTB220C)	Right Angle Wall Mount (VSBKTA106 + VSBKTB305W)	Pole Mount (VSBKTA152 + VSBKTB203W)

Your local Securview™ HDCVI solutions professional: