

CONNECTED
switch gear®
We will turn you on®

SPLASH

Series

**IP53 Weatherproof
Power Outlets
& Surface Switches**

Data Specification 2018
1300 071 378

TRUSTED

5
YEAR
WARRANTY
IN HOUSE

Description

The latest style in the SPLASH Series Weatherproof Range of surface switches and surface mounted socket outlets is designed to provide years of trouble free operation in the most extreme weather conditions. Socket outlets are designed to achieve a IP53 protection rating and is rated at 240V AC 10A. The switch connections come pre-wired, and line connection is separate to each switch allowing for circuit separation. Available in grey, full size and half size, in both 10A and 15A configurations, along with a 5 Year InHouse Warranty.

Features

- Compact Size (86mm x 86mm x 65mm)
- Available in full size and half size
- Large toggles ensure convenient ON-OFF switch operation
- Ample conduit entries in the base (2 x 25mm plain, 2 x 20mm plain, 1 x 25mm and 1 x 20mm on each side of box and 1 x 25mm rear entry for back wiring)
- Separate Switch Wiring
- IP53 Rating

Separate Switch Wiring

Convenient ON-OFF Switch

Compact Size

Ample Conduit Entries



Approvals

SAA

Technical Parameters


- Rated Amperage: 10A and 15A
- Rated Voltage: 250V ac
- Rated Frequency 50Hz / 60Hz
- Standard: AS/NZS3133
- IP Protection: IP53

Description

The latest style in the SPLASH Series Weatherproof Range of surface switches and surface mounted socket outlets, designed to provide years of trouble free operation in the most extreme weather conditions. Surface switches are designed to achieve a IP66 protection rating and is rated at 240V AC 16AX. Available in grey, up to 2 gang configurations, along with a 5 Year InHouse Warranty.

Features

- Compact Size (86mm x 86mm x 65mm)
- Large toggles ensure convenient ON-OFF switch operation
- Ample conduit entries in the base (2 x 25mm plain, 2 x 20mm plain, 1 x 25mm and 1 x 20mm on each side of box and 1 x 25mm rear entry for back wiring)
- 2 Way Switching

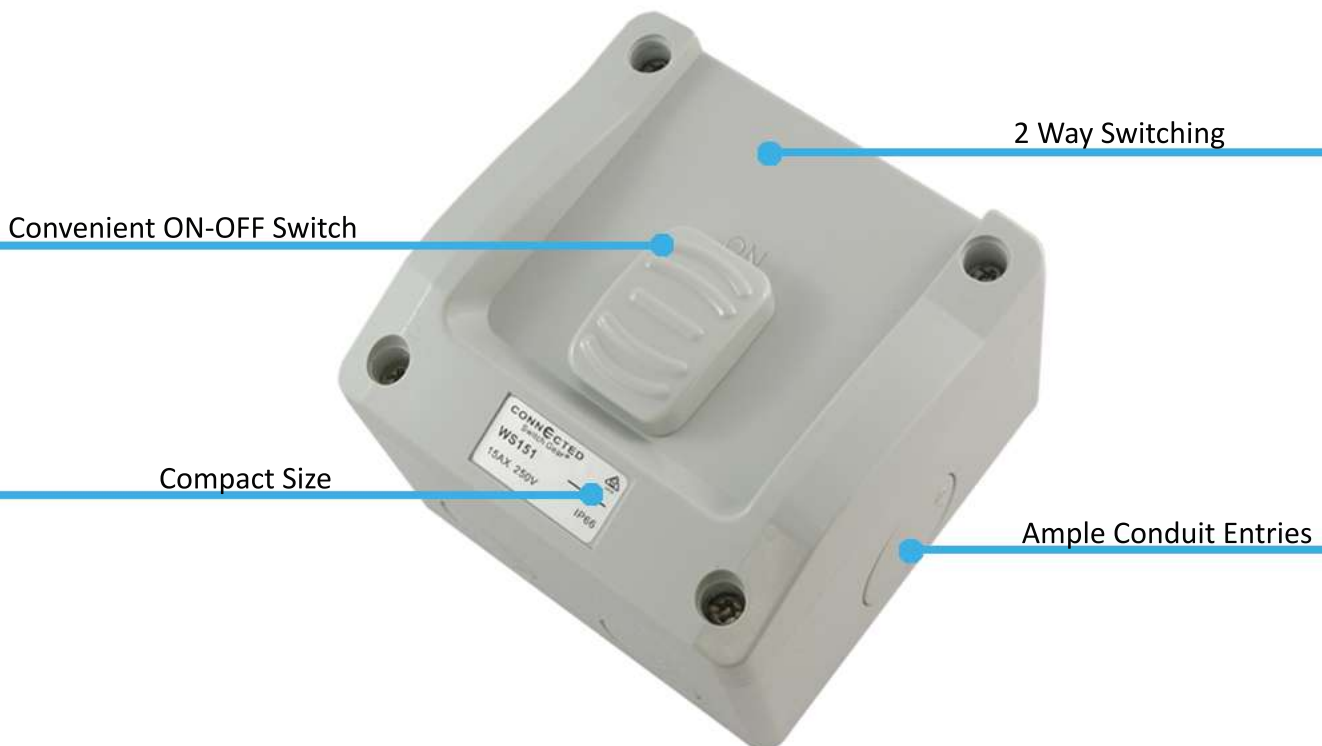

Approvals

SAA

Technical Parameters

- Rated Amperage: 16AX
- Rated Voltage: 250V ac
- Rated Frequency 50Hz / 60Hz
- Standard: IEC60669-1, AS/NZS3133
- IP Protection: IP66

Specifications

Power Outlets					
Product Code	Description	Rating (Amps)	L (mm)	W (mm)	H (mm)
WPOS10	Single Weatherproof GPO - OLD STYLE	10AX	77	74	85
WPOD10	Double Weatherproof GPO - OLD STYLE	10AX	77	120	85
WPOS10N	Single Weatherproof GPO - NEW STYLE	10AX	84.5	114.5	80
WPOS10NH	Single Weatherproof GPO Half Size - NEW STYLE	10AX	84	69	79
WPOS15N	Single Weatherproof GPO - NEW STYLE	15AX	84.5	114.5	80
WPOS15NH	Single Weatherproof GPO Half Size - NEW STYLE	15AX	84	69	79
WPOD10N	Double Weatherproof GPO - NEW STYLE	10AX	84.5	114.5	80
WPOD10XN	Double Weatherproof GPO + Extra 10A Switch - NEW STYLE	10AX	84.5	114.5	80
WPOD15N	Double Weatherproof GPO - NEW STYLE	15AX	84.5	114.5	80

Surface Switches						
Product Code	Description	No. Of Gang	Rating (Amps)	L (mm)	W (mm)	H (mm)
WS101	Weatherproof Switch - OLD STYLE	1 Gang	10AX	77	77	64
WS102	Weatherproof Switch - OLD STYLE	2 Gang	10AX	78	119	64
WS151N	Weatherproof Switch - NEW STYLE	1 Gang	15AX	86	86	65
WS152N	Weatherproof Switch - NEW STYLE	2 Gang	15AX	86	86	65

Warranty

The SPLASH Series of product come with a 5 Year InHouse Warranty. That means that you have peace of mind knowing that if a fault develops within a five year period, Connected Group Australia will cover the cost of replacing the product and it's installation.*

*See our website for full terms and conditions www.connectedswitchgear.com.au

Related Products



The SPLASH Series is also available in the original style, in both power outlets and surface switches.