

Professional Series 1080p Motorised HDCVI Dome

Model: VSCVI2MPFBIRM




A strong performer in all conditions, the Professional Series from Securview offers Full HD 1080p streaming with the convenience of a motorised varifocal lens.

Camera Features

- Streams Full HD 1080p/2.0MP (1920 x 1080)
- Motorised 2.7 ~ 12mm lens, fixed iris
- 99 ~ 34° horizontal viewing angles
- Up to 500m HD video transmission over coax
- Infrared illumination up to 30m
- IP66 rated for weather resistance
- Auto white balance & 3D noise reduction
- Adjustable ball-socket bracket mount

Backwards compatible: HDCVI/Analogue switchable BNC video input. Analogue mode configuration via OSD using HDCVI DVR or tester.

| Model | VSCVI2MPFBIRM |
|------------------------|---|
| General | |
| Camera Style | Weather Resistant Bullet |
| Image Sensor | 1/2.8" 2.4 Megapixel CMOS |
| Effective Pixels | 1984 (H) x 1225 (V) |
| Signal Noise Ratio | > 50dB |
| Camera | |
| Lens | 2.7 ~ 12mm Motorised Lens; Fixed Iris |
| Angle of View | 99° (wide) ~ 34° (tele) |
| Electronic Shutter | 1/3 ~ 1/100,000s |
| Minimum Illumination | 0.05 Lux at F1.2 (Colour) / 0 Lux IR Active |
| Day/Night | Auto (ICR) / Colour / B&W |
| White Balance | Auto |
| Noise Reduction | 2D / 3D |
| Gain Control | Auto |
| Backlight Compensation | BLC / HLC / DWDR |
| Audio Input | N/A |
| Transmission Distance | Over 500m via 75-3 coaxial cable |
| Synchronisation | Internal |
| OSD Menu | Support |
| Alarm Interface | N/A |
| Video | |
| Video Compression | H.264 / MJPEG |
| Resolution | 1080p (1920 x 1080) to CIF (352 x 288) |
| Frame Rate | 25fps (1080p and lower) |
| Video Output | BNC CVI HD output / CVBS SD output (switchable) |
| Environment | |
| Ingress Protection | IP66 |
| Vandal Resistant | No |
| Maximum Infrared Range | 30m |
| Power Input | 12VDC |
| Power Consumption | < 7.5W |
| Dimensions | 213 x 80 x 72mm |
| Weight | 0.55kg |
| Operating Environment | -30° to 60°C / RH95% (max) |
| Product Diagram | |

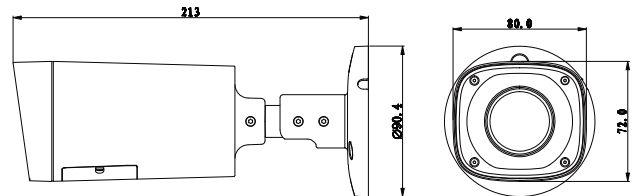

Compatible Accessories

Accessories sold separately, additional adapters may be required.



VSBKTA122



VSBKTA152

Your local Securview™ professional: