

Ultimate Series 1080p Motorised HDCVI Bullet

Model: VSCVI2MPFBIRM30M




Experience unparalleled performance and ease of use with the Ultimate Series from Securview, with auto-iris motorised lens, dual voltage support and up to 500m Full HD video transmission.

Camera Features

- Streams Full HD 1080p/2.0MP (1920 x 1080)
- Motorised 2.7 ~ 12mm lens, auto iris
- 93 ~ 35° horizontal viewing angles
- Up to 500m HD video transmission over coax
- Infrared illumination up to 50m
- IP67 rated for weather resistance
- Dual voltage compatible: 12VDC and 24VAC
- Alarm and audio I/O interface
- Digital WDR & 3D noise reduction

Backwards compatible: HDCVI/Analogue switchable BNC video input. Analogue mode configuration via on-camera buttons or OSD using HDCVI DVR or tester.

Model	VSCVI2MPFBIRM30M
General	
Camera Style	Weather Resistant Bullet
Image Sensor	1/2.8" 2.4 Megapixel CMOS
Effective Pixels	1984 (H) x 1225 (V)
Signal Noise Ratio	> 50dB
Camera	
Lens	2.7 ~ 12mm Motorised Lens; Auto Iris
Angle of View	93° (wide) ~ 35° (tele)
Electronic Shutter	1/3 ~ 1/100,000s
Minimum Illumination	0.05 Lux at F1.2 (Colour) / 0 Lux IR Active
Day/Night	Auto (ICR) / Colour / B&W
White Balance	Auto
Noise Reduction	2D / 3D
Gain Control	Auto
Backlight Compensation	BLC
Audio Input	1 channel in
Transmission Distance	Over 500m via 75-3 coaxial cable
Synchronisation	Internal
OSD Menu	Support
Alarm Interface	1 channel in / 1 channel out
Video	
Video Compression	H.264 / MJPEG
Resolution	1080p (1920 x 1080) to CIF (352 x 288)
Frame Rate	25fps (1080p and lower)
Video Output	BNC CVI HD output / CVBS SD output (switchable)
Environment	
Ingress Protection	IP66
Vandal Resistant	No
Maximum Infrared Range	50m
Power Input	12VDC / 24VAC
Power Consumption	< 7.4W
Dimensions	273 x 95 x 95mm
Weight	1.20kg
Operating Environment	-30° to 60°C / RH95% (max)
Product Diagram	

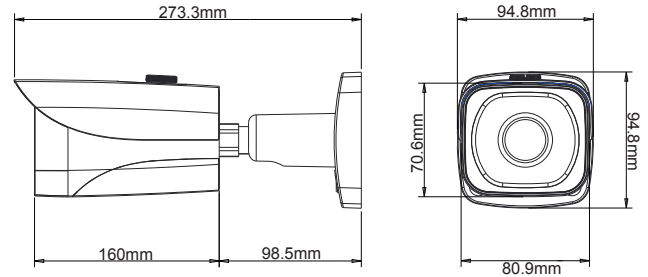

Compatible Accessories

Accessories sold separately, additional adapters may be required.



VSBKTA121



VSBKTA152

Your local Securview™ professional: