




Amazing low light colour.

Professional Series: Fixed lens HDCVI turret in 5.0MP

Create high performance surveillance over coax systems with the Securview Professional Series. Deliver evidence in challenging conditions with weather resistance for outdoor use, low light colour footage and a small install footprint.

- Stream up to 5.0MP (2880 x 1620) at 25fps
- 2.8mm fixed lens with wide 132° viewing angle
- Large 1/2" sensor for excellent low light performance
- Smart infrared illumination, up to 50m range
- Superb low light colour at 0.001lx
- True WDR (120dB) and 2D/3D noise reduction
- Up to 700m video transmission over coaxial cable
- HDCVI / AHD / TVI / Analog switchable via DIP switch
- IP67 rated weather resistance for outdoor use
- Compact Ø106mm installation footprint

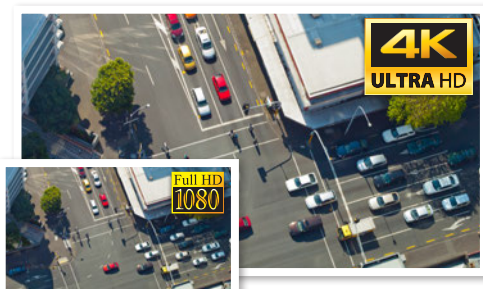

Ultra HD Recording Over Coax





DVR Cross Compatibility



Superb Low Light Performance

Model		5.0MP Fixed Turret	
Camera	Product Image		
	Ordering Information	VSCVI-5DIRG2: 2.8mm Fixed Lens	
	Image Sensor	1/2" 5.0 Megapixel CMOS	
	Effective Pixels	2880 (H) x 1620 (V)	
Lens	Minimum Illumination	0.001 Lux at F1.6 (Colour) / 0 Lux IR Active	
	Electronic Shutter	1/3 ~ 1/100,000s	
	Infrared Range	50m	
	Signal Noise Ratio	> 65dB	
DORI	Distance	Detect	63.6m
		Observe	25.4m
		Recognise	12.7m
		Identify	6.4m
Video	Resolution	5.0MP (2880 x 1620) to 960H (960 x 576)	
	Frame Rate	25fps (5.0MP and lower)	
	Day/Night	Auto (ICR) / Colour / B&W	
	Lighting Compensation	BLC / HLC / WDR (120dB)	
	White Balance	Auto / Manual	
	Noise Reduction	2D / 3D	
	Gain Control	Auto	
	Transmission Distance	Rated for up to 700m via 75-3 coaxial cable (performed in ideal test conditions)	
Interface	Audio Input	1 channel in & Built-in mic	
	Alarm Interface	N/A	
	Video Output	1 x HDCVI / AHD / TVI / Composite video output (switchable via DIP switch)	
	Synchronisation	Internal	
Environmental	OSD Menu	Support	
	Ingress Protection	IP67	
	Vandal Resistant	N/A	
	Housing	Aluminium	
	Power Input	12VDC	
	Power Consumption	< 5.9W	
	Dimensions	Ø106 x 94mm	
	Weight	0.43kg	
Operating Environment	-40° to 60°C / RH95% (max)		

Application

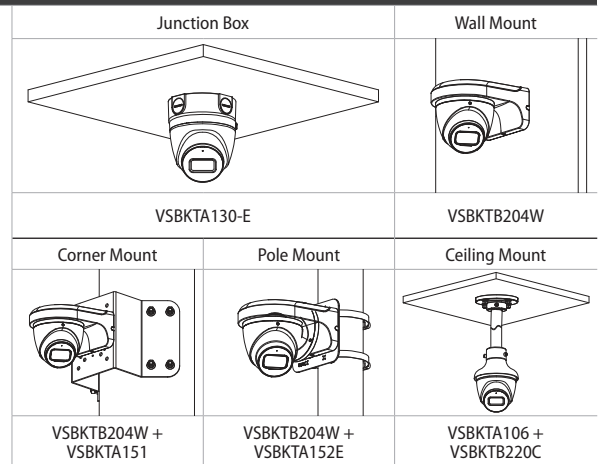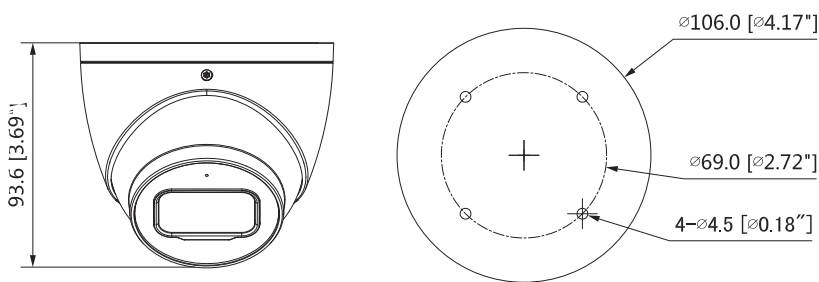

Your local Securview™ HDCVI solutions professional: