

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.



V60.000.W1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION





VIVI 500 HIGH POWER LED - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad **ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 500 HIGH POWER LED

V60.000 *

Ø 60



Dimensions and weight

Height: 600 mm
Diameter: 600 mm
Weight: 7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1932

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED




- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V			*ADD. SUFFIX	
E27 	50 W	5300 Lm	4000 K	.H1L
			3000 K	.H1R
E27 	60 W	7000 Lm	4000 K	.W1L
			3000 K	.W1R



LED LAMPS




LVD EMC ERP 6000h

Technical details on page 552.

PHOTOMETRIC DATA SAMPLE - VIVI 500 HIGH POWER LED






SAVE -47%

HIGH POWER LED 60W
(power consumption)

Area: 10x10mt
Height: 5m
27 lux

=




HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

VIVI 500

GRAND SIZE

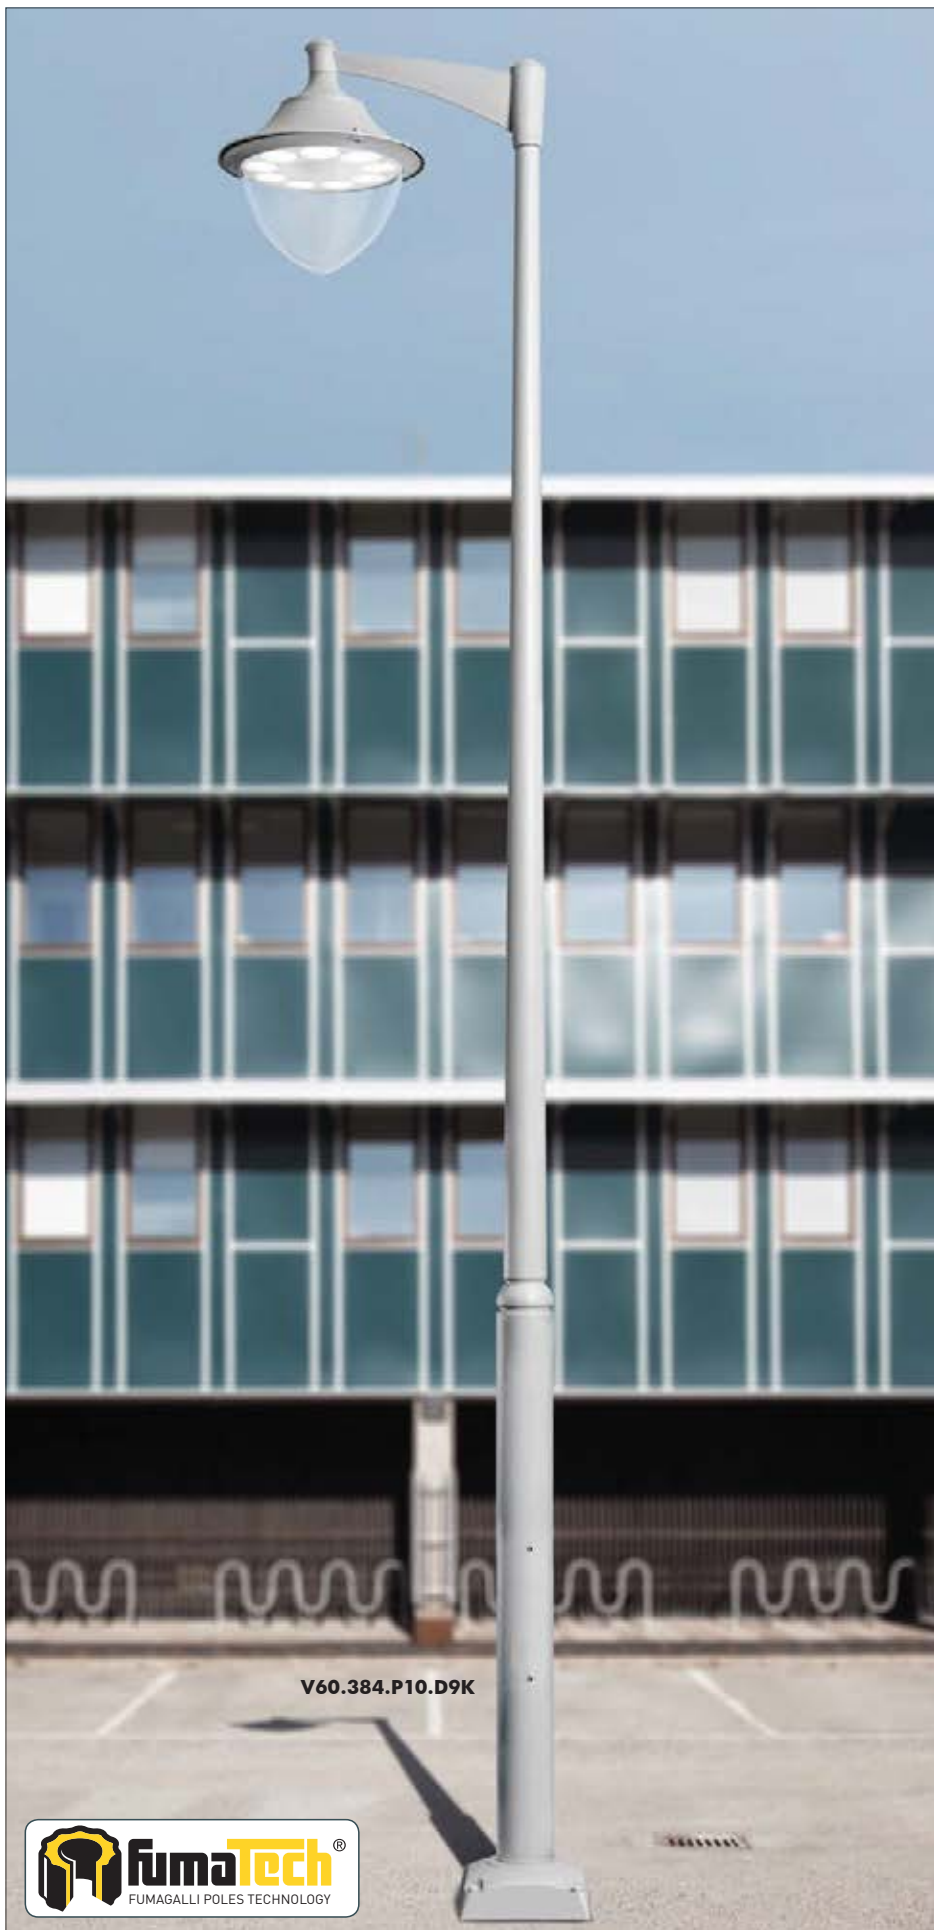

V60.384.P10.D9K



L51.128.W1L




V60.253



V60.129.D9K

MADE IN ITALY



VIVI 500
V60.000

Ø 60
600
600

Pcs 1
Kg 7,7
mc 0,10

LUIGI 500-DR
L51.128

680
600

Pcs 1
Kg 7,7
mc 0,10

*rope not included

PILAR/VIVI500
V60.253

920
650

Pcs 1
Kg 9,7
mc 0,15

NEW LOT/VIVI500
V60.115

600
710

Pcs 1
Kg 8,7
mc 0,13

MARIO/VIVI500
V60.129

600
600

Pcs 1
Kg 7,1
mc 0,11

*rope not included

EKTOR 6000 PILAR/VIVI500 2L
V60.384.P20

1800
6220
400

Pcs 1
Kg 94,6
mc 1,46

EKTOR 6000 PILAR/VIVI500 1L
V60.384.P10


1030
6220
400

Pcs 1
Kg 86,2
mc 1,36

VIVI 500

GRAND SIZE





EKTOR 5000 PILAR/VIVI500 1L V60.377.P10	AKILLE 5000 PILAR/VIVI500 1L V60.427.P10
Pcs 1 Kg 55,7 mc 0,43	
EKTOR 4500 PILAR/VIVI500 1L V60.374.P10	AKILLE 4500 PILAR/VIVI500 1L V60.424.P10
Pcs 1 Kg 50,2 mc 0,40	
EKTOR 4000 PILAR/VIVI500 1L V60.371.P10	AKILLE 4000 PILAR/VIVI500 1L V60.421.P10
Pcs 1 Kg 44,7 mc 0,37	

EKTOR 5000 PILAR/VIVI500 2L V60.377.P20	AKILLE 5000 PILAR/VIVI500 2L V60.427.P20
Pcs 1 Kg 65,1 mc 0,60	
EKTOR 4500 PILAR/VIVI500 2L V60.374.P20	AKILLE 4500 PILAR/VIVI500 2L V60.424.P20
Pcs 1 Kg 59,6 mc 0,57	
EKTOR 4000 PILAR/VIVI500 2L V60.371.P20	AKILLE 4000 PILAR/VIVI500 2L V60.421.P20
Pcs 1 Kg 54,1 mc 0,54	