




Full HD
1080

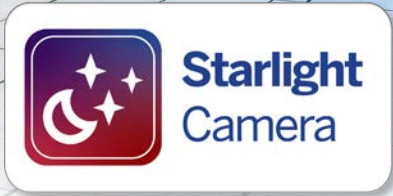

Low light performance.

Professional Series: Fixed lens HDCVI mini turret dome in 2.0MP

Create high performance surveillance over coax systems with the Securview Professional Series. Deliver evidence in challenging conditions with weather resistance for outdoor use, low light colour footage and a small install footprint.

- Stream up to 2.0MP (1920 x 1080) at 25fps
- 2.8mm fixed lens with wide 109° viewing angle
- Large sensor for excellent low light performance
- Smart infrared illumination, up to 30m range
- Superb low light colour at 0.001lx
- True WDR (120dB) and 3DNR noise reduction
- Video transmission over coaxial cable
- HDCVI / AHD / TVI / Analog DVR support
- IP67 rated weather resistance for outdoor use
- Compact Ø94mm installation footprint



Starlight Low Light Performance



Switch Camera to Suit DVR



Great Weather Resistance

		2.0MP Fixed Lens Turret Dome	
Camera	Model	VSCVI-2DIRG	
	Image Sensor	2.0 Megapixel CMOS	
	Effective Pixels	1920 (H) x 1080 (V)	
	Minimum Illumination	0.001 Lux at F1.6 (Colour) / 0 Lux IR on	
	Electronic Shutter	1/25 s ~ 1/100,000s	
	Infrared Range	30m	
Lens	Signal Noise Ratio	> 65dB	
	Lens	2.8mm F1.6 Fixed Lens	
	Angle of View	109° (H) / 58° (V) / 127° (D)	
DORI	Focus	Fixed focus with 0.7m Min. Focus Distance	
	Detect (25px/m)	42.2m	
	Observe (63px/m)	16.9m	
	Recognise (125px/m)	8.4m	
	Identify (250px/m)	4.2m	
Video	Resolution	2.0MP (1920 x 1080) to 960H (960 x 576)	
	Frame Rate	25fps (2.0MP and lower)	
	Day/Night	Auto (ICR) / Colour / B&W	
	Lighting Compensation	BLC / HLC / WDR (120dB)	
	White Balance	Auto ; Area WB	
	Noise Reduction	3D NR	
	Gain Control	Auto / Manual	
	Transmission	Video transmission over coaxial cable	
Interface	Audio Input	Built-in microphone	
	Alarm Interface	N/A	
	Video Output	HDCVI / AHD / TVI / Analogue (CVBS) via DIP switch	
	Synchronisation	Internal	
	OSD Menu	Support	
Environmental	Ingress Protection	IP67	
	Housing	Metal	
	Power Input	12VDC	
	Power Consumption	< 3.1W	
	Dimensions	Ø94 x 85.7mm	
	Weight	0.33kg	
Operating Environment		-40° to 60°C / RH95% (max)	

Application	Dimensions		Junction Box	Wall Mount
			VSBKTA13A-E	VSBKTB205W-E
			Pole Mount	Ceiling Mount
		VSBKTB205W-E + VSBKTA152E	VSBKTA106 + VSBKTB220C	

Your local Securview™ HDCVI solutions professional: