

2.0 Megapixel WDR Infrared Fixed Mini Bullet

Model: VSIP2MPFBMINIIRV2



Takes fixed-lens IP surveillance to professional standards. Experience full HD 1080p, wide dynamic range and smart detection features such as face detection.

Camera Features

- Stream up to 2.0 megapixel (1920 x 1080) at 25fps
- 3.6mm fixed lens with 93° viewing angle
- Day/night (auto ICR) with 40m maximum infrared range
- Wide dynamic range (120db) with back/highlight compensation
- 3D digital noise reduction and auto white balance
- Power via 12VDC or Power over Ethernet (802.3af)
- Supports triple stream and smart detection technologies
- IP67 weather resistant housing for external use
- ONVIF, PSIA and CGI compliance

Compatible Accessories

Sold separately. Adapters may be required, check compatibility list for details.



VSBKTA122





VSBKTA151



VSBKTA152

Model		VSIP2MPFBMINIIRV2
General		
Camera Style	Weather Resistant Mini Bullet	
Image Sensor	1/2.7" 2.0 Megapixel Progressive Scan CMOS	
Effective Pixels	1920 (H) x 1080 (V)	
Signal Noise Ratio	> 50dB	
Camera		
Lens	3.6mm F2.2 Fixed Lens	
Angle of View	93°	
Electronic Shutter	Auto / Manual (1/3 ~ 1/100000s)	
Minimum Illumination	0.01 Lux at F2.0 (Colour) / 0 Lux at F2.0 (IR on)	
Day/Night	Auto (ICR) / Colour / B&W	
White Balance	Auto / Sunny / Night / Outdoor / Customised	
Noise Reduction	3D Digital Noise Reduction	
Gain Control	Auto / Manual	
Backlight Compensation	BLC / HLC / WDR (120dB)	
Audio Input	N/A	
Audio Compression	N/A	
Alarm Interface	N/A	
Network Interface	RJ45 (10/100 Base-T)	
Memory Slot	N/A	
Bit Rate	H.264: 32K ~ 10Mbps	
ONVIF Conformance	ONVIF, PSIA, CGI Compliant	
Smart Functions	Tripwire / Intrusion / Scene Change / Face Detection	
Video		
Video Compression	H.264 / H.264B / H.264H / MJPEG	
Resolution	Configurable from 2.0MP (1920 x 1080) to CIF (352 x 288)	
Frame Rate	Main	1080p and lower (1 ~ 25fps)
	Sub	D1 and lower (1 ~ 25fps)
	Third	720p and lower (1 ~ 13fps)
Video Output	N/A	
Environment		
Ingress Protection	IP67	
Vandal Resistant	N/A	
Maximum Infrared Range	40m	
Power Input	12VDC / PoE (802.3af)	
Power Consumption	< 6.5W	
Dimensions	70 x 70 x 180mm	
Weight	0.40kg	
Operating Environment	-30° to 60°C / RH95% (max)	
Product Dimensions		

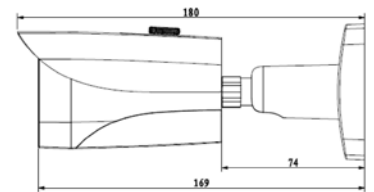

Your local VIP Vision™ professional: