



Excels in all applications.


Professional Series: Motorised lens HDCVI domes available in 2.0MP & 4.0MP

A excellent camera in all conditions with a wide range of compatible brackets, Professional Series domes from Securview offer up to 9x analogue resolution & easy adjustments via a motorised lens, all in a durable housing.

- Stream up to 4.0MP (2560 x 1440) at 25fps
- Motorised varifocal 2.7 ~ 12mm lens with fixed iris
- Up to 700m video transmission over coaxial cable
- Smart infrared illumination, up to 30m range
- Dual BNC outputs for HD and composite video
- True WDR (120dB) and 2D/3D noise reduction
- Dual voltage compatible (4.0MP model only)
- IP67/IK10 for weather and vandal resistance



Up to 9x Image Resolution vs D1

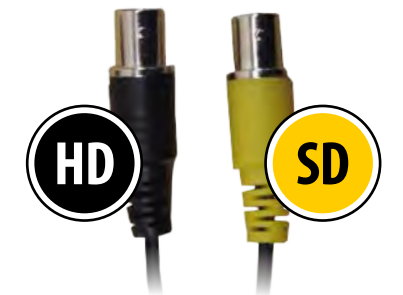

Dedicated HD / SD Outputs



Weather & Vandal Resistant

Model	VSCVI2MPVDIRMV2	VSCVI4MPVDIRM			
Image Sensor	1/2.7" 2.1 Megapixel CMOS	1/3" 4.1 Megapixel CMOS			
Effective Pixels	1928 (H) x 1088 (V)	2688 (H) x 1520 (V)			
Signal Noise Ratio	> 50dB	> 65dB			
Lens	2.7 ~ 12mm F1.4 Motorised Lens; Fixed Iris	2.7 ~ 12mm F1.3 Motorised Lens; Fixed Iris			
Angle of View	99° (wide) ~ 37° (tele)	98° (wide) ~ 26° (tele)			
Focus	Auto/Manual / 0.3m Min. Focus Distance	Auto/Manual / 0.2m Min. Focus Distance			
Minimum Illumination	0.03 Lux at F1.4 (Colour) / 0 Lux IR Active	0.01 Lux at F1.3 (Colour) / 0 Lux IR Active			
Electronic Shutter	1/3 ~ 1/100,000s	1/4 ~ 1/100,000s			
Day/Night	Auto (ICR) / Colour / B&W	Auto (ICR) / Manual			
Infrared Range	30m				
White Balance	Auto / Manual				
Noise Reduction	2D / 3D				
Gain Control	Auto				
Lighting Compensation	BLC / HLC / WDR (120dB)				
Resolution	1080p (1920 x 1080) to CIF (352 x 288)	4.0MP (2560 x 1440) to CIF (352 x 288)			
Frame Rate	25fps (1080p and lower)	25fps (4.0MP), 25fps (1080p and lower)			
Transmission Distance	Rated for up to 700m via 75-3 coaxial cable (performed in ideal test conditions)				
Audio Input	N/A				
Alarm Interface	N/A				
Video Output	2 x BNC video output (1 x HDCVI / 1 x Composite SD)				
Synchronisation	Internal				
OSD Menu	Support				
Ingress Protection	IP67				
Vandal Resistant	IK10				
Housing	Metal, Polycarbonate				
Power Input	12VDC	12VDC / 24VAC			
Power Consumption	< 5.0W	< 10.1W			
Dimensions	Ø122 x 89mm				
Weight	0.45kg	0.48kg			
Operating Environment	-30° to 60°C / RH95% (max)				
Diagram					
Accessories					
Models	Junction Box (VSBKTA137)	In-Ceiling Mount (VSBKTB200C)	Wall Mount (VSBKTB203W)	Wall Mount Rain Shield (VSBKTA200W)	Pole Mount (VSBKTA152 + VSBKTB203W)

Your local Securview™ HDCVI solutions professional: