

Value Series 720p Fixed HDCVI Mini Dome

Model: VSCVI1MPDIRV2



Double your image resolution with the Watchguard range of compact HDCVI cameras. Stream in real-time at 720p HD with these lightweight, weather resistant, easy-install surveillance cameras.

Camera Features

- Streams HD 720p/1.0MP (1280 x 720)
- Fixed 3.6mm lens; 80° viewing angle
- Up to 800m HD video transmission over coax
- Infrared illumination up to 20m
- IP66 rated for weather resistance
- Compact size with adjustable mount
- All metal construction

Compatible Accessories

Accessories sold separately, additional adapters may be required.



VSBKT204W




VSBKTA121



VSBKTA152

Model	VSCVI1MPDIRV2
General	
Camera Style	Weather Resistant Mini Dome
Image Sensor	1/2.9" 1.0 Megapixel CMOS
Effective Pixels	1280 (H) x 720 (V)
Signal Noise Ratio	> 50dB
Camera	
Lens	3.6mm Fixed Lens
Angle of View	80°
Electronic Shutter	1/50 ~ 1/10,000s
Minimum Illumination	0.01 Lux at F1.2 (Colour) / 0 Lux IR Active
Day/Night	Auto (ICR) / Colour / B&W
White Balance	Auto
Noise Reduction	2D
Gain Control	Auto
Backlight Compensation	BLC
Audio Input	N/A
Transmission Distance	Over 800m via 75-3 coaxial cable
Synchronisation	Internal
OSD Menu	Support
Alarm Interface	N/A
Video	
Video Compression	H.264
Resolution	720p (1280 x 720) to CIF (352 x 288)
Frame Rate	25fps (720p and lower)
Video Output	BNC CVI HD output
Environment	
Ingress Protection	IP66
Vandal Resistant	No
Maximum Infrared Range	20m
Power Input	12VDC
Power Consumption	< 2.5W
Dimensions	Ø93 x 80mm
Weight	0.35kg
Operating Environment	-30° to 60°C / RH95% (max)
Product Diagram	

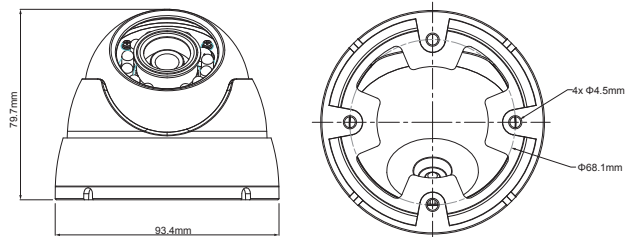

Your local VIP Vision™ professional: