

3.0 Megapixel 20m Infrared IP Dome Camera

Model: VSIP3MPDIR



Specifications		
General	Camera Style	Weatherproof Mini Dome
	Image Sensor	1/3" 3.0 Megapixel Aptina CMOS
	Effective Pixels	2048 (H) x 1536 (V)
	Signal Noise Ratio	> 50dB
Camera	Lens	3.6mm Fixed Lens
	Angle of View	70°
	Electronic Shutter	Auto/Manual, 1/3 ~ 1/10000s
	Minimum Illumination	0.01 Lux at F1.2 (Colour) / 0.005 Lux at F1.2 (B&W)
	Day/Night	Auto (ICR) / Colour/B&W
	White Balance	Auto/Manual
	Noise Reduction	3D Digital Noise Reduction
	Gain Control	Auto/Manual
	Backlight Compensation	BLC / HLC / DWDR
	Audio Input	N/A
	Audio Compression	N/A
	Alarm Interface	N/A
	Network Interface	RJ45 (10/100 Base-T)
	Memory Slot	N/A
	Bit Rate	H.264: 32K ~ 8192Kbps
	ONVIF Conformance	Profile S Compliant
Video	Video Compression	H.264 / MJPEG
	Resolution	3.0MP (2048x1536) / 1080p (1920x1080) / 720p (1280x720)
	Frame Rate	3.0MP (1 ~ 20fps), 1080p/720p (1 ~ 25fps)
	Video Output	N/A
Environment	Ingress Protection	IP66
	Vandal Resistant	No
	Maximum Infrared Range	20m
	Power Input	12VDC / PoE (802.3af)
	Power Consumption	< 5W
	Dimensions	Ø114 x 86mm
	Weight	0.40kg
	Operating Environment	-20° to 60°C / RH95% (max)

Product Highlights


- Record up to 3.0MP (2048 x 1536) at 20fps
- 3.6mm fixed lens with 70° viewing angle
- 20m infrared range & IP66 rated housing

Product Overview

The VIP Vision VSIP3MPDIR is a compact 3.0 Megapixel IP dome camera capable of streaming beyond 1080p high definition footage.

This camera features up to 3.0MP (2048 x 1536) image resolution with 20m infrared range for low light and night video capture.

The camera housing is IP66 rated and is suitable for outdoor surveillance.

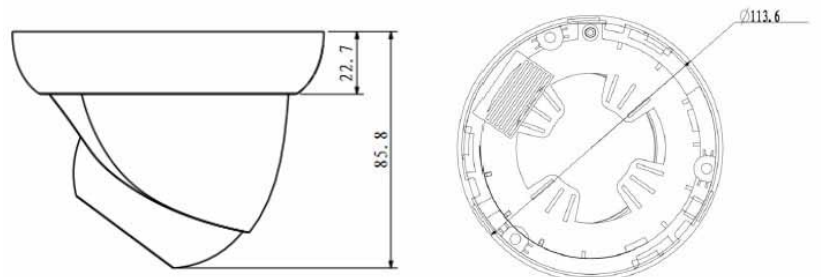

Your VIP Vision IP surveillance dealer: