

# 3.0 Megapixel Vandal Resistant IP Dome Camera

Model: VSIP3MPVDMINI3.6



Specifications		
General	Camera Style	Vandal Resistant Mini Dome
	Image Sensor	1/3"3 Megapixel Aptina CMOS
	Effective Pixels	2048 (H) x 1536 (V)
	Signal Noise Ratio	> 50dB
Camera	Lens	3.6mm Fixed Lens
	Angle of View	70°
	Electronic Shutter	Auto/Manual, 1/3 ~ 1/10000s
	Minimum Illumination	0.1 Lux at F1.2 (Colour)
	Day/Night	Auto (Electronic) / Colour/B&W
	White Balance	Auto/Manual
	Noise Reduction	3D Digital Noise Reduction
	Gain Control	Auto/Manual
	Backlight Compensation	BLC / HLC / DWDR
	Audio Input	N/A
	Audio Compression	N/A
	Alarm Interface	N/A
	Network Interface	RJ45 (10/100 Base-T)
	Memory Slot	MicroSD slot up to 64GB
	Bit Rate	H.264: 32K ~ 8192Kbps
	ONVIF Conformance	Profile S Compliant
Video	Video Compression	H.264 / MJPEG
	Resolution	3.0MP (2048x1536) / 1080p (1920x1080) / 720p (1280x720)
	Frame Rate	3.0MP (1 ~ 20fps), 1080p/720p (1 ~ 25fps)
	Video Output	N/A
Environment	Ingress Protection	IP66
	Vandal Resistant	IK10
	Maximum Infrared Range	N/A
	Power Input	12VDC / PoE (802.3af)
	Power Consumption	< 3W
	Dimensions	Ø110 x 54mm
	Weight	0.25kg
	Operating Environment	-20° to 60°C / RH95% (max)

## Product Highlights



- Record up to 3.0MP (2048 x 1536) at 20fps
- 3.6mm fixed lens with 70° viewing angle
- Compact housing design with & IP66/IK10

## Product Overview

The VIP Vision VSIP3MPVDMINI3.6 is a compact 3.0 Megapixel IP dome camera capable of streaming beyond 1080p high definition footage.

This camera features up to 3.0MP (2048 x 1536) image resolution and a fixed 3.6mm lens for 70° viewing angle.

The camera housing is IP66 rated and is suitable for outdoor surveillance.

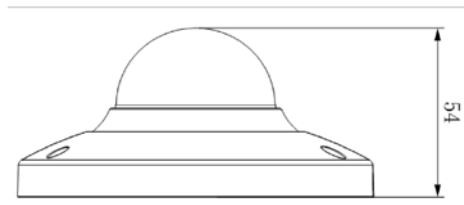

Your VIP Vision IP surveillance dealer: